

QV-IPC716261T9BR-FMUR16

2MP Smart Dual Light Fixed Turret Network Camera





Based on Qualvision's advanced technologies, Easy Series provides intelligent, simple and inclusive products and solutions. With Smart Dual Light technology, the camera records the full-color video and information of key events and reduces light pollution efficiently when the target is out of the monitoring area.



Key Features

- High quality imaging with 2MP resolution
- Efficient H.265+ compression technology
- 24/7 colorful imaging
- Focus on human targets classification
- Water and dust resistant (IP67)
- Built-in microphone for real-time audio security

Dimensions

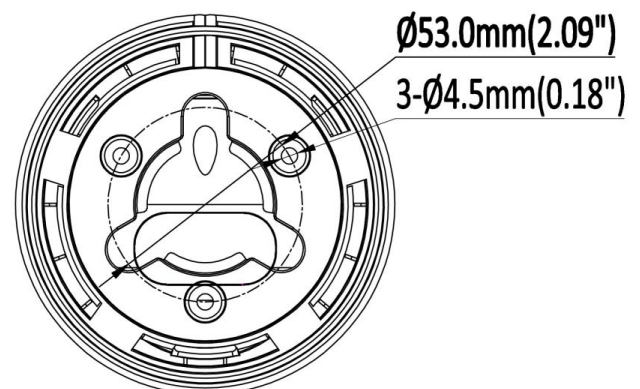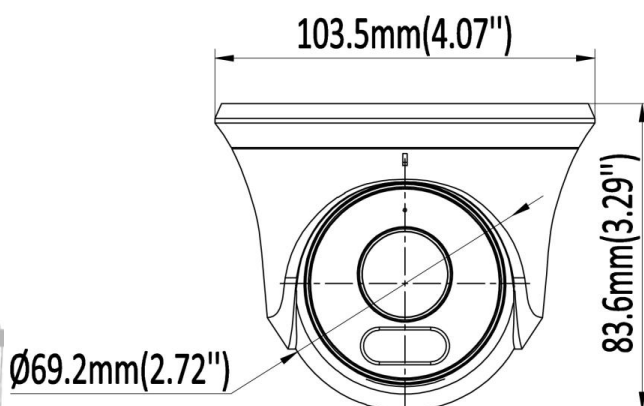



Specification


Camera	
Image Sensor	1/2.9" Progressive Scan CMOS Sensor
Min. Illumination	0.008lux (Color) , 0 Lux (IR on)
Illumination Distance	30 m (IR light) 30 m (warm light)
Strobe Light	N/A
Smart IR	Support
Pan/Tilt/Rotation Range	Pan: 0° ~ 360° Tilt: 0° ~ 75° Rotation: 0° ~ 360°
Lens	
Focal Length	2.8/3.6 mm
Aperture	F1.6
FOV	2.8 mm @ F1.6 horizontal FOV: 100°, vertical FOV: 55°, diagonal FOV: 120° 3.6 mm @ F1.6 horizontal FOV: 84°, vertical FOV: 43°, diagonal FOV: 100°
Lens Mount	M12
Compression Standard	
Video Compression	H.264/H.264+/H.265/H.265+
H.264 Codec Profile	Base/Main/High profile
H.265 Codec Profile	Main profile
Video Bit Rate	11 Kbps ~ 6Mbps
Triple Streams	N/A
Audio Compression	G.711A/G.711U
Audio Bit Rate	64 Kbps
Image	
Max. Image Resolution	1920 × 1080
Main Stream	50Hz: 25fps 1080P (1920 × 1080) 25fps 960P (1280 × 960) , 25fps 720P (1280 × 720) 60Hz: 30fps 1080P (1920 × 1080) 30fps 960P (1280 × 960) , 30fps 720P (1280 × 720)
Sub Stream	50Hz: 25fps D1 (704 × 576) , 25fps CIF (352 × 288) 60Hz: 30fps D1 (704 × 480) , 30fps CIF (352 × 240)
Third Stream	N/A
Image Setting	Brightness/Contrast/Saturation/Hue/Sharpness
Shutter Time	Auto/Manual, 1/3~1/10000s



Day/Night	IR Cut Filter
Wide Dynamic Range	DWDR
Digital Noise Reduction	2D/3D DNR
BLC	Support
HLC	Support
ROI	Support
Rotate	Support
Smart Feature	
Basic Event	Motion detection, video tampering
Smart Event	Line crossing detection, area intrusion
Face Detection	N/A
Network	
Network Storage	N/A
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P
System Compatibility	Onvif (Profile G, Profile S, Profile T), CGI
Security	User authentication, IP address filtering, video mask
User	Up to 10 user
Web Browsers	Plug-in required live view: IE 10, IE 11 Local service: Chrome 57.0+, Firefox 52.0+
Mobile Surveillance	IOS, Android
Interface	
Communication Interface	1 RJ45 10M/100M Ethernet Port
On-board Storage	Built-in Micro SD/SDHC/SDXC slot, up to 128GB
MIC	Support
Speaker	N/A
Audio I/O	N/A
Alarm I/O	N/A
Reset Button	Support
General	
Operating Conditions	-30°C ~ 60°C (-22°F ~ 140°F) Humidity 95% or less (non-condensing)
Power Supply	DC12V ± 10%
POE	PoE (802.3 af)
Power Consumption	MAX. 5.6W

Protection Level	IP67
Material	Metal + Plastic
Dimensions	Φ 103.5 × 83.6 mm (Φ 4.07" × 3.29")
Gross Weight	315 g (0.69 lb)

Related Accessories

LB10	LB02	LB14C	PM03	CM700
Junction Box, Φ 112.5 × 49.5 MM	Junction Box, non-waterproof, Φ103.3 × 37.8MM	Wall Mount, Φ 120 × 105.8 × 183.5 MM	Pole Mount, Φ170 × 135.8 × 43.7 MM	Pendant Mount, Φ 116 × 734.5 MM
				
LB01B				
Junction Box, 145.2 × 145.2 × 53.5 MM				
				

Please select accessories according to the installation scenario:

